

The undersigned requests that the present international application be processed according to the Patent Cooperation Treaty.

For receiving Office us  Rec'd PCT/STO 27	DEC 2004
International Filing Date 0/51	9095
Name of receiving Office and "PCT Internat	

Applicant's or agent's file reference 06975-551WO1 (if desired) (12 characters maximum) Box No. I TITLE OF INVENTION NETWORK CONFIGURATION MANAGEMENT Box No. II APPLICANT This person is also inventor Name and address: (Family name followed by given name; for a legal entity, full official designation. Telephone No. The address must include postal code and name of country. The country of the address indicated in this Box is the applicant's State (that is, country) of residence if no State of residence is indicated below.) Facsimile No. AMERICA ONLINE, INC. 22000 AOL Way Teleprinter No. Dulles, VA 20166 United States of America Applicant's registration No. with the Office State (that is, country) of nationality: State (that is, country) of residence: This person is applicant all designated all designated States except the United States the States indicated in X for the purposes of: the United States of America of America only the Supplemental Box Box No. III FURTHER APPLICANT(S) AND/OR (FURTHER) INVENTOR(S) Name and address: (Family name followed by given name; for a legal entity, full official designation. This person is: The address must include postal code and name of country. The country of the address indicated in this Box is the applicant's State (that is, country) of residence if no State of residence is indicated below.) applicant only FORTMAN, Peter A. applicant and inventor 126 Stoneledge Place, NE inventor only (If this check-box Leesburg, VA 20176 is marked, do not fill in below) United States of America Applicant's registration No. with the Office State (that is, country) of nationality: State (that is, country) of residence: US US This person is applicant all designated all designated States except the United States the States indicated in for the purposes of: States the United States of America of America only the Supplemental Box Further applicants and/or (further) inventors are indicated on a continuation sheet. AGENT OR COMMON REPRESENTATIVE; OR ADDRESS FOR CORRESPONDENCE Box No. IV The person identified below is hereby/has been appointed to act on behalf common of the applicant(s) before the competent International Authorities as: representative Name and address: (Family name followed by given name; for a legal entity, full official designation. Telephone No. The address must include postal code and name of country.) (202) 783-5070 RENNER, W. Karl Facsimile No. Fish & Richardson P.C. (202) 783-2331 1425 K Street, N.W., 11th Floor Teleprinter No. Washington, DC 20005-3500 United States of America Applicant's registration No. with the Office Address for correspondence: Mark this check-box where no agent or common representative is/has been appointed and the space above is used instead to indicate a special address to which correspondence should be sent.

for the purposes of: States the United States of	randica — or randica only — the Supplemental Box				
This person is applicant for the purposes of:  all designated States all designated States except the United States of America of America only the States indicated in the Supplemental Box					
State (that is, country) of nationality:	tate (that is, country) of nationality:  State (that is, country) of residence:				
	applicant only  applicant and inventor  inventor only (If this check-box is marked do not fill in helow)  Applicant's registration No. with the Office				
Name and address: (Family name followed by given name; for a legal entity, full official designation. The address must include postal code and name of country. The country of the address indicated in this Box is the applicant's State (that is, country) of residence if no State of residence is indicated below.)					
This person is applicant all designated all designated States all designated States all designated States of the United States of	f America Of America only the Supplemental Box				
State (that is, country) of nationality:	State (that is, country) of residence:				
is marked, do not fill in below) Applicant's registration No. with the Office					
•	applicant and inventor inventor only (If this check-box				
address must include postal code and name of country. The country of the address the applicant's State (that is, country) of residence if no State of residence is indicated	applicant only				
Name and address: (Family name followed by given name; for a legal entity, full official designation. The This person is:					
This person is applicant all designated states for the purposes of:  All designated states of the United States of					
State (that is, country) of nationality:	State (that is, country) of residence:				
	is marked, do not fill in below)  Applicant's registration No. with the Office				
	applicant and inventor inventor only (If this check-box				
the applicant's State (that is, country) of residence if no State of residence is indicated	d below.) applicant only				
Name and address: (Family name followed by given name; for a legal entity, full address must include postal code and name of country. The country of the address	official designation. The This person is:				
This person is applicant all designated all designated State for the purposes of:	es except the United States the States indicated in				
State (that is, country) of nationality: US	State (that is, country) of residence:				
Vienna VA 22180-6267 United States of America	is marked, do not fill in below)—— Applicant's registration No. with the Office				
909 Moorefield Hill Grove	applicant and inventor inventor only (If this check-box				
the applicant's State (that is, country) of residence if no State of residence is indicated  E.G. Livaditis	applicant only				
Name and add unily name followed by given name; for a legal entity, full address must include postal code and name of country. The country of the address	indicated in this Box is				
If none of the fg sub-boxes is used, this sheet should not be included.	D/OR (FURTHER) INVENTOR(S)  ded the request.				
Continuation of Box No. III FURTHER APPLICANT(S) ANI	DOD (FUNTHER) BRANCON(S)				

Box No. V DESI	GNATIONS					
The filing of this date, for the grant	constitutes under Rule 4.9(s y kind of protection available	<ul> <li>the designation of all Con and, where applicable, for th</li> </ul>	ntractices bound by the ne gran ooth regional and	PCT on the international filing national patents.		
However,						
DE Germany is not	designated for any kind of r	national protection				
KR Republic of Ko	rea is not designated for any	kind of national protection		•		
RU Russian Federa	tion is not designated for an	y kind of national protection				
(The check-boxes above may be used to exclude (irrevocably) the designations concerned in order to avoid the ceasing of the effect, under the national law, or an earlier national application from which priority is claimed. See the Notes to Box No. V as to the consequences of such national law provisions in these and certain other States.)						
Box No. VI PRIO	RITY CLAIM					
The priority of the followi	ng earlier application(s) is he	reby claimed:				
Filing date of earlier application	Number of earlier application	Where earlier application is:				
(day/month/year)		national application: country or Member of WTO:	national application:* regional Office	international application: receiving Office		
item (1)						
item (2)						
item (3)	·					
Further priority clair	ms are indicated in the Suppl	emental Box				
Further priority claims are indicated in the Supplemental Box.  The receiving Office is requested to prepare and transmit to the International Bureau a certified copy of the earlier application(s) (only if the earlier application was filed with the Office which for the purposes of this international application is the receiving Office) identified above as:						
all items item	n (1) item (2)	item (3)	other, s	ee Supplemental Box		
*Where the earlier application is an ARIPO application, indicate at least one country party to the Paris Convention for the Protection of Industrial Property or one Member of the World Trade Organization for which the earlier application was filed (Rule 4.10(b)(ii)):						
Box No. VII INTERN	ATIONAL SEARCHING	AITHORES:	••••••			
Choice of International Searching Authority (ISA) (if two or more International Searching Authorities are competent to carry out the international search, indicate the Authority chosen; the two-letter code may be used):						
ISA/ US	***************************************			•••••••••••		
Request to use result of a International Searching Au	earlier search; reference (	to that search (if an earlie	er search has been carried	out by or requested from the		
Date (day/month/year)  Number  Country (or regional Office)						
Box No. VIII DECLARATIONS						
The following declarations are contained in Boxes Nos. VIII (i) to (v) (mark the applicable check-boxes below and indicate in the right column the number of each type of declaration):  Number of declarations						
Box No. VIII (i) Declarations as to the identity of the inventor						
Box No. VIII (ii)  Declaration as to the applicant's entitlement, as at the international filing date, to apply for and be granted a patent:						
Box No. VIII (iii)  Declaration as to the applicant's entitlement, as at the international filing date, to claim the priority of the earlier application						
Box No. VIII (iv)  Declaration of inventorship (only for the purposes of the designation of the United States of America):						
Box No. VIII (v) Declaration as to non-prejudicial disclosures or exceptions to lack of novelty :						

Box No. IX CHECK LIST: LANGUAGE	OF FILING				
This international at the on contains:  (a) in paper form, the solowing number of sheets:	This international application is accompliated by the following item(s) (mark the applicable check-boxes below and indicate it right column the number of each item):	8 Number n of items			
request (including	1.  fee calculation sheet 2.  original separate power of attorney	:1			
declaration sheets) : 4	3. original general power of attorney	:			
description (excluding sequence listings and/or tables : 13	4. Copy of general power of attorney; reference number if any:	:1			
claims : 5 abstract : 1	5. statement explaining lack of signature 6. priority document(s) identified in Box No. VI as	:			
drawings : 8	item(s)	······::::::::::::::::::::::::::::::::			
Sub-total number of sheets : 31	7. translation of international application into (language):	······::			
sequence listings :	8. separate indications concerning deposited microorganior other biological material				
tables related thereto :  (for both, actual member of	9. sequence listings in computer readable form (indicate type and number of carriers)	:			
sheets if filed in paper form whether or not also filed in computer readable form; see (c) below)	(i) copy submitted for the purposes of international se Rule 13ter only (and not as part of the international	earch under application):			
Total number of sheets 31  (b) only in computer readable form (Section 801(a)(i))	(ii) (only where check box (b)(i)or (c) (i) is marked in additional copies including, where applicable, the purposes of international search under Rule 13ter	left column) :			
(i) sequence listings (ii) tables related thereto	(iii) together with relevant statement as to the identity copies with the sequence listings mentioned in left	t column .			
(c) also in computer readable form (Section 801(a)(ii))	10. tables in computer readable form related to sequence li (indicate type and number of carriers)	:			
(i) sequence listings (ii) tables related thereto	(i) copy submitted for the purposes of internation  Section 802(b-quater) only (and not as part of application)	the international			
Type and number of carriers (diskette,	(ii) (only where check-box (b)(ii) or (c)(ii) is marke additional copies including, where applicable,	the copy for the			
CD-ROM, CD-R or other) on which are contained the:	purposes of international search under Section  (iii) together with relevant statement as to the ident copies with the tables mentioned in left column	tity of the copy or			
Sequence listings:	11. Souther (specify) Transmittal Letter; Postcard and C				
9(ii) and/or 10(ii), in right column)	(additional copies to be indicated under items 9(ii) and/or 10(ii), in right column)				
Figure of the drawings which should accompany the abstract: 1	Language of filling of the international application: ENGLISH	<u> </u>			
Box No. X SIGNATURE OF APPLICANT	ACENT OR COMMON PERPESENTATIVE				
Next to each signature, indicate the name of the person signing and the capacity in which the person signs (if such capacity is not obvious from reading the request)					
W. Karl Renner, Reg. No. 41,265	Francis Off				
Date of actual receipt of the purported international application:	For receiving Office only	2. Drawings:			
<ol> <li>Corrected date of actual receipt due to later but timely received papers or drawings completing the purported international application:</li> </ol>	3	received:			
4. Date of timely receipt of the required corrections under PCT Article 11(2):					
5. International Searching Authority (if two or more are competent): ISA /	6. Transmittal of search copy delayed until search fee is paid	not received:			
Pate of receipt of the record copy by the International Bureau					

8/PRTS

06975-557451 1 9 0 9 5 DT01 Rec'd PCT/PTC 2 7 DEC 2004

# Network Configuration Management

#### **TECHNICAL FIELD**

This description relates to configuration management in networked systems.

#### **BACKGROUND**

5

10

15

20

25

30

In many existing networked systems, client nodes establish connections to host nodes in a network. The client nodes and host nodes are then able to communicate for a duration of time. In many situations, an Internet Service Provider (ISP) may manage the host nodes. For example, the ISP may configure the host nodes with groups of modems contained in modem pools, and a client node may acquire access to the Internet by connecting to one of the modems in the pool. The client nodes may include home or business computing systems. In these scenarios, the host nodes may often be referred to as Points of Presence, or PoP's. In certain scenarios, the client nodes may be able to directly communicate with the host nodes using broadband connections.

Often, host nodes in a network will maintain policy information. This policy information may include access information that may be used by the client nodes to access the host nodes. For example, the access information could include modem dial-in numbers, Internet Protocol (IP) addresses, and the like. The host nodes then provide the policy information to the various client nodes in the network. In certain scenarios, the host nodes may even provide configuration information, such as modem configuration information, to the client nodes. The client nodes may use this initial configuration information to set up their dial-up modems, and may also use the policy information to select a dial-in access number for a given host node.

If client nodes do not have access to local dial-in access numbers, they may often use a more generic access number to make an initial connection. For example, a client node may use an "800" access number to access a host node using a dial-up connection. The client node may then specify a particular area code, and the host node may respond by providing a list of dial-in access numbers that correspond to the specified area code. Subsequently, the client node may establish dial-up connections using one of the provided access numbers.

In certain situations, the client or host nodes may collect various forms of historical or statistical information relating to their network connections. For example, for modem-based connections, a client node or a host node may collect information relating to the total number of calls initiated or received, the call success rate, average session lengths, and the like. This type of information can be displayed to an administrator on a graphical user interface (GUI) to provide a summary of network activity, and can also be distributed to users in a report format.

5

10

15

20

25

30

# **SUMMARY**

One implementation provides a computer-implemented method for modifying network configuration information on a client node. In this implementation, the client node establishes a first network connection with a host node using at least one network configuration parameter and collects configuration history information. The configuration history information includes at least one parameter that is related to the first network connection. The client node also analyzes policy information that includes a rule that is used for specifying a predetermined criterion. If one of the parameters in the configuration history information does not satisfy the predetermined criterion, the client node modifies one of the network configuration parameters. The client node is then capable of establishing a second network connection with the host node using the modified network configuration parameter.

The details of various implementations are set forth in the accompanying drawings and the description below. Other features will be apparent from the description and drawings, and from the claims.

#### **DESCRIPTION OF DRAWINGS**

FIG. 1, FIG. 2A, and FIG. 3A are block diagrams of systems that include a host node and client nodes.

FIG. 2B is a block diagram of the host node in the system of FIG. 2A.

FIG. 2C is a block diagram of the client node in the system of FIG. 2A.

FIG. 3B is a block diagram of the host node in the system of FIG. 3A.

FIG. 3C is a block diagram of the client node in the system of FIG. 3A.

FIG. 4 is a block diagram of a computing system.

# **DETAILED DESCRIPTION**

FIG. 1 is a block diagram of a system 100 that includes a host node 102 that is coupled to a first client node 108 and a second client node 108. The system 100 provides for the modification of network configuration information on the first client node 108 and/or the second client node 108. Each client node 108 includes policy information 110, one or more network configuration parameters 112, and configuration history information 114. The host node 102 includes policy information 104 and network configuration parameters 106.

5

10

15

20

25

30

During operation, each client node 108 establishes a network connection, such as a modem or Internet-based broadband connection, with the host node 102. In establishing this connection, each client node 108 uses its network configuration parameters 112. These parameters 112 may include modem parameters (as shown in FIG. 2C and described below), Internet network parameters (as shown in FIG. 3C and described below), and the like. Similarly, when opening a connection with each client node 108, the host node 102 uses its network configuration parameters 106. These parameters 106 may include modem parameters (as shown in FIG. 2B and described below), Internet network parameters (as shown in FIG. 3B and described below), and the like.

After the connection has been established, each client node 108 is able to send data to and receive data from the host node 102. Each client node 108 also collects configuration history information 114, which contains one or more parameters that are related to the connection established with the host node 102. The configuration history information 114 may also contain parameters related to previous connections that have been established with the host node 102. The configuration history information 114 may include modem history information (as shown in FIG. 2C and described below), Internet history information (as shown in FIG. 3C and described below), and the like. The policy information 110 contains one or more rules that are used for specifying one or more predetermined criteria. The policy information 110 may include modem policy information (as shown in FIG. 2C and described below), Internet policy information (as shown in FIG. 3C and described below), and the like.

If a parameter in the configuration history information 114 does not satisfy one of the predetermined criteria, the client node 108 modifies its network configuration parameters 112 when establishing subsequent connections with the host

node 102. For example, a rule contained in the policy information 110 may be applied to determine that a performance statistic in the configuration history information 114 does not satisfy one of the predetermined criteria relating to performance. In this scenario, the client node 108 would then modify its network configuration parameters 112 in an attempt to improve the performance of connections made with the host node 102.

5

10

15

20

25

30

In some implementations, the host node 102 includes policy information 104 and provides this information to the client node 108. The client node 108 receives this information from the host node 102 and stores this information as its policy information 110. The policy information 104 on the host node 102 may include modem policy information (as shown in FIG. 2B and described below), Internet policy information (as shown in FIG. 3B and described below), and the like.

In some implementations, the rules contained in the policy information 104 maintained on the host node 102 and the policy information 110 maintained on the client node 108 include rules for specifying cost or performance criteria. In these implementations, the client node 108 is able to use these rules to determine how to modify the network configuration parameters 112. For example, if the rules specify that the client node 108 should more strongly weight cost considerations, then the client node 108 may modify the network configuration parameters 112 based upon analysis of the configuration history information 114 to enable a cost-efficient mode of communication with the host node 102. If, however, the rules specify that the client node 108 should more strongly weight performance considerations, then the client node 108 may modify the network configuration parameters 112 based upon analysis of the configuration history information 114 to enable a high-performance mode of communication with the host node 102. In certain situations, the client node 108 may enable a high-performance mode of communication at the expense of higher cost. However, the rules attempt to strike a balance between the various cost and performance considerations based on the requirements or specifications of the policy information 110.

In some implementations, the policy information 110 maintained by the client node 108 includes host access information used by the client node 108 when modifying the network configuration parameters 112. The host access information may include modem access numbers for the host node 102 or Internet Protocol (IP)

address information for the host node 102. For example, if the client node 108 and the host node 102 communicate using a modem network, the host node 102 may update the policy information 110 of the client node 108 with an updated set of modem access numbers for the host node 102. The client node 108 may then update its network configuration parameters 112 to use one of the updated modem access numbers when establishing subsequent network connections with the host node 102 based on the rules contained in the policy information 110.

5

10

15

20

25

30

In some implementations, each client node 108 sends its configuration history information 114 to the host node 102. The host node 102 is then capable of processing the configuration history information 114 from each client node 108 to update its policy information 104. For example, the host node 102 may review and process performance statistics contained in the configuration history information 114 received from each client node 108 to update the rules relating to performance in the policy information 104.

FIG. 2A is a block diagram of one implementation of the system 100 shown in FIG. 1. In this implementation, each client node 108 uses the host node 102 to gain access to an Internet network 202. For example, an Internet Service Provider (ISP) may allow each client node 108, such as client or home computers, to gain access to the Internet network 202 by connecting to the host node 102.

Each client node 108 includes a modem 206 to communicate with the host node 102. The host node 102 includes first, second, and third modems 204 that comprise a modem pool. During operation, each client node 108 uses its modem 206 to connect to one of the modems 204 in the modem pool by using its network configuration parameters 112. The modem 206 of each client node 108 uses the network configuration parameters 112 when connecting to the host node 102. Once these connections are established, each client node 108 has access to the Internet network 202.

FIG. 2B is a block diagram of the host node 102 in the system of FIG. 2A. In this implementation, the host node 102 maintains both its modern policy information 104 and its modern parameters 106A in a database. The modern parameters 106A are part of the full set of network configuration parameters 106 maintained by the host node 102, and are associated with a connection to a given client node 108. In one implementation, the host node 102 provides the modern policy information 104 to

each client node 108. The host node 102 also configures one of the modems 204 in its modem pool using the modem parameters 106A.

As shown in the example in FIG. 2B, the modem policy information 104 may, for example, include access phone numbers, rules for specifying cost or performance criteria. The access phone numbers include the numbers for each modem 204 in the modem pool on the host node 102. As discussed earlier, the rules in the modem policy information 104 are used to specify various cost or performance criteria. In one implementation, the host node 102 provides these rules to each client node 108. The rules may specify that cost considerations are to be strongly weighted, that performance considerations are to be strongly weighted, or that cost and performance considerations are to be more evenly weighted. In one implementation, the various cost or performance criteria are based upon analysis of performance statistics gathered on the host node 102 from each client node 108. These rules may then be used determine the configuration of modem parameters, such as parameters 106 on the host node 102 or the parameters 112 on each client node 108.

5

10

15

20

25

30

As also shown in FIG. 2B, the modem parameters 106A may, for example, include a dialer number, a data compression technique, a modulation technique, and a connection speed. The dialer number is the phone number used by the modem 206 of the client node 108 when connecting to the host node 102. The data compression technique and the modulation technique specify the types of data compression and modulation that are to be used during modem communication. For example, the data compression technique may be MNP5, V.42bis, or any other standard or recognized form of data compression, while the modulation technique may be V.21, V.22bis, V.32bis, or any other standard or recognized form of modulation. The connection speed specifies the speed of data transmission used by the modems 204 on the host node 102. The modem parameters 106A may include any number of other standard parameters that may be used to set and configure each modem 204 in the modem pool of the host node 102.

FIG. 2C is a block diagram of the client node in the system of FIG. 2A. In this implementation, the client node 108 maintains its modem policy information 110, its modem parameters 112, and its modem history information 114 in a database. The client node 108 is able to use the modem policy information 110 along with the modem history information 114 to modify its modem parameters 112 when

appropriate. The modern parameters 112 affect the settings of the modern 206 used by the client node 108 when communicating with the host node 102.

The modem policy information 110 includes access phone numbers, rules for specifying cost or performance criteria. The access phone numbers include the access numbers for each modem 204 in the modem pool on the host node 102. The rules in the modem policy information 110 are used to specify various cost or performance criteria that are to be implemented by the client node 108. In one implementation, the client node 108 receives these from the host node 102. The rules may specify that cost considerations are to be strongly weighted, that performance considerations are to be strongly weighted, or that cost and performance considerations are to be more evenly weighted. These rules will be used to determine the configuration of the modem parameters 112 on the client node 108.

5

10

15

20

25

30

As also shown in FIG. 2C, the modem parameters 112 may include, for example, a dialed number, a data compression technique, a modulation technique, and a connection speed. The dialed number is the phone number dialed by the client node 108 when connecting to the host node 102. This dialed number will correspond to the access number of one of the modems 204 in the modem pool of the host node 102. The data compression technique could be MNP5, V.42bis, or any other standard or recognized form of data compression. Similarly, the modulation technique could be V.21, V.22bis, V.32bis, or any other standard or recognized form of modulation. The connection speed specifies the speed of data transmission used by the modem 206 when connecting to the host node 102. The modem parameters 112 may include any number of other standard parameters that may be used to set and configure the modem 206 on the client node 108. In one implementation, the modem 206 on the client node 108 stores a version of the modem parameters 112.

The modem history information 114 includes various history, performance, statistical, or other forms of information relating to the use of the modem parameters 112 for connections made between the client node 108 and the host node 102. As shown in FIG. 2C, the modem history information 114 may include, for example, the last modem connection speed, the last dialed number, and performance statistics. The last modem connection speed specifies the speed of the previous connection between the modem 206 and one of the modems 204 on the host node 102. The last dialed number specifies the previous number dialed by the modem 206 to access the host

node 102. This number will correspond to one of the modems 204 in the modem pool on the host node 102. The performance statistics may include various forms of statistical information relating to the performance of connections between the modem 206 on the client node 108 and the modem pool on the host node 102. The performance statistics may also include failure rate information relating to these connections, such as abnormal disconnect rates, connect failure rates, retrain rates, busy rates, and signal-to-noise rates. The modem history information 114 may include many other forms of information in addition to the information listed in FIG. 2C. Examples of such additional information include the total number of connections attempted and/or established with the host node 102 and the individual or average session lengths with the host node 102.

5

10 .

15

20

25

30

During operation, the host node 102 may provide its updated modem policy information 104 to each client node 108 using existing connections. The host node 102 uses its modem parameters 106A when communicating with a given client node 108 using one of its modems 204. Each client node 108 may then store this information as its modem policy information 110. The modem policy information 110 includes a set of access numbers to the modems 204 in the modem pool on the host node 102. When one of the client nodes 108 wants to initiate a subsequent connection with the host node 102, it will use one of these access numbers, along with its other modem parameters 112, to establish a connection from its modem 206 to the modem 204 on the host node 102 that is associated with this access number. This client node 108 will also store information related to this connection with the host node 102 in its modem history information 114.

The client node 108 may also use its modem policy information 110, along with its modem history information 114, to determine whether it will modify its modem parameters 112. In doing so, the client node 108 uses the rules contained within the modem policy information 110 that specify the cost and performance criteria. If these rules specify that performance considerations are to be strongly weighted, then the client node 108 may consider making modifications to its parameters 112 to improve performance. For example, the client node 108 may determine from its modem history information 114 that a parameter, such as a performance statistic for a previously dialed number, does not satisfy one of the predefined performance criteria specified by the rules of the policy information 110.

In this scenario, the client node 108 may try increasing the connection speed in the modem parameters 112 to achieve higher performance. Alternatively, the client node 108 may select a different access number in the modem parameters 112 if connections made using the current access number are not yielding sufficiently high performance.

5

10

15

20

25

30

In certain situations, however, the rules of the policy 110 may specify that cost considerations are to be more strongly weighted. For example, the client node 108 may determine from its modem history information 114 that a parameter, such as a performance statistic, does not satisfy one of the predefined cost criteria. In this case, the client node 108 may decide to modify its modem parameters 112 to use a slower speed, or a more cost-efficient, connection. In this fashion, the client node 108 is capable of dynamically modifying its modem parameters 112 based on the rules contained in the modem policy information 110 and on its collected modem history information 114.

FIG. 3A is a block diagram of another implementation of the system 100 shown in FIG. 1. In this implementation, each client node 108 connects to the host node 102 using the Internet network 202. For example, the host node 102 and each client node 108 may be directly accessible to each other through the Internet network 202 using broadband connections.

Each client node 108 includes a cable modem 302 to communicate with the host node 102. During operation, each client node 108 uses its cable modem 302 to initiate a high-speed connection to the host node using the Internet network 202. The cable modem 302 of each client node 108 uses the network configuration parameters 112 when connecting to the host node 102. Once these connections are established, each client node 108 is able to communicate with the host node 102.

FIG. 3B is a block diagram of the host node in the system of FIG. 3A. In this implementation, the host node 102 maintains both its Internet policy information 104 and its network parameters 106A in a database. The network parameters 106A are part of the full set of network configuration parameters 106 maintained by the host node 102, and are associated with a connection to a given client node 108. In one implementation, the host node 102 provides the Internet policy information 104 to each client node 108. The host node 102 also configures its network interface to the Internet network 202 using the network parameters 106A.

As shown in the example in FIG. 3B, the Internet policy information 104 may include, for example, Internet Protocol (IP) addresses and rules for specifying cost or performance criteria. The IP addresses include the various IP addresses that may be used by each client 108 to access the host node 102. The rules in the Internet policy information 104 are used to specify various cost or performance criteria that are to be implemented by the host node 102. In one implementation, the host node 102 provides these rules to each client node 108. The rules may specify that cost considerations are to be strongly weighted, that performance considerations are to be strongly weighted, or that cost and performance considerations are to be more evenly weighted. In one implementation, the various cost or performance criteria are based upon analysis of performance statistics gathered on the host node 102 from each client node 108. These rules will be used to determine the configuration of modem parameters, such as parameters 106 on the host node 102 or the parameters 112 on each client node 108.

As also shown in FIG. 3B, the network parameters 106A may include, for example, a client IP address, a data compression technique, an encryption technique, and a connection speed. The client IP address corresponds to the IP address of the client node 108 that is connected to the host node 102. The data compression technique and the encryption technique specify the type of data compression and encryption that are to be used during network communication. The data compression technique could be any standard or recognized form of data compression. Similarly, the encryption technique could be asymmetric, symmetric, or any other standard or recognized form of encryption. The connection speed specifies the speed of data transmission used to communicate with the host node 102. The network parameters 106A may include any number of other standard parameters that may be used to set and configure the network interface to the host node 102.

FIG. 3C is a block diagram of the client node in the system of FIG. 3A. In this implementation, the client node 108 maintains its Internet policy information 110, its network parameters 112, and its network history information 114 in a database. The client node 108 is able to use the Internet policy information 110 along with the network history information 114 to modify its network parameters 112 when appropriate. The network parameters 112 affect the interface settings used by the client node 108 when communicating with the host node 102.

The network policy information 110 includes host IP addresses and rules for specifying cost or performance criteria. The host IP addresses are associated with the host node 102. The rules in the Internet policy information 110 are used to specify various cost or performance criteria that are to be implemented by the client node 108. In one implementation, the client node 108 receives these from the host node 102.

5

10

15

20

25

30

As also shown in FIG 3C, the network parameters 112 may include, for example, a host IP address, a data compression technique, an encryption technique, and a connection speed. The host IP address is associated with the host node 102. The data compression technique could be any standard or recognized form of data compression. Similarly, the encryption technique could be any standard or recognized form of encryption. The connection speed specifies the speed of data transmission between the client node 108 and the host node 102 using the Internet network 202.

The network history information 114 includes various history, performance. statistical, or other forms of information relating to the use of the network parameters 112 for connections made between the client node 108 and the host node 102. As shown in FIG. 3C, the network history information 114 may include, for example, the last connection speed, the host IP address, and performance statistics. The last connection speed specifies the speed of the previous connection between the client node 108 and the host node 102. The host IP address is associated with the previous address used by the client node 108 to connect to the host node 102. The performance statistics may include various forms of statistical information relating to the performance of connections between the client node 108 and the host node 102. The performance statistics may also include failure rate information relating to these connections, such as disconnect rates and connect failure rates. The network history information 114 may include many other forms of information in addition to the information listed in FIG. 3C, such as the total number of connections attempted and/or established with the host node 102, and individual or average session lengths with the host node 102.

During operation, the client node 108 may use its Internet policy information 110, along with its network history information 114, to determine whether it will modify its network parameters 112. In doing so, the client node 108 uses the rules contained within the Internet policy information 110 that specify the cost and performance criteria. If these rules specify that performance considerations are to be

strongly weighted, then the client node 108 may consider making modifications to its parameters 112 to improve performance. For example, the client node 108 may try increasing the connection speed in the network parameters 112 to achieve higher performance. Alternatively, the client node 108 may select a different host IP address in the network parameters 112 if connections made using the current host IP address are not yielding high enough performance, as evidenced by the statistics maintained in the network history information 114. If the rules, however, specify that cost considerations are to be more strongly weighted, then the client node 108 may decide to modify its network parameters 112 to use a slower speed, or a more cost-efficient, connection to the host node 102. In this fashion, the client node 108 is capable of dynamically modifying its network parameters 112 based on the rules contained in the Internet policy information 110 and on its collected network history information 114.

5

10

15

20

25


30

FIG. 4 is a block diagram of a computing system 400 that may be part of the client node 108. The computing system 400 includes a processor 402, a memory 404, a storage device 406, a network adaptor 408, and an input/output device 410. The components 402, 404, 406, 408, and 410 are interconnected using a system bus. The processor 402 is capable of processing instructions for execution within the computing system 400. In one implementation, the processor 402 is a single-threaded processor. In another implementation, the processor 402 is a multi-threaded processor. The processor 402 is capable of processing instructions stored in the memory 404.

The memory 404 stores information within the computing system 400. In one implementation, the memory 404 is a computer-readable medium. In certain implementations, the memory 404 is either a volatile or a non-volatile memory unit.

The storage device 406 is capable of providing mass storage for the computing system 400. For example, the storage device 406 may provide database storage for the computing system 400. In one implementation, the storage device 406 is a computer-readable medium. In various different implementations, the storage device 406 may be a floppy disk device, a hard disk device, an optical disk device, or a tape device.

The network adaptor 408 provides an interface to external network devices. For example, when included within the client node 108 shown in FIG. 2A, the network adaptor 408 is a modern adaptor to interface with the modern 206. When



The input/output device 410 provides input/output operations for the computing system 400. The input/output device 410 may include, for example, a keyboard, a pointing device, and/or a display device.

5

A number of implementations have been described. Nevertheless, it will be understood that various modifications may be made. Accordingly, other implementations are within the scope of the following claims.



# WHAT IS CLAIMED IS:

1. A computer-implemented method for modifying network configuration information on a client node, the method comprising:

establishing a first network connection between the client node and a host node using at least one network configuration parameter;

collecting configuration history information on the client node, the configuration history information having at least one parameter that is related to the first network connection;

analyzing policy information on the client node, the policy information having a rule that is used for specifying a predetermined criterion;

if one of the parameters in the configuration history information does not satisfy the predetermined criterion, modifying one of the network configuration parameters; and

establishing a second network connection between the client node and the host node using the modified network configuration parameter.

15

20

30

10

5

- 2. The computer-implemented method of claim 1, further comprising receiving the policy information from the host node prior to analyzing the policy information.
- 3. The computer-implemented method of claim 1, wherein:
  the first network connection comprises a first modem connection;
  the at least one network configuration parameter comprises at least one
  modem configuration parameter; and

the second network connection comprises a second modem connection.

4. The computer-implemented method of claim 1, further comprising:

if one of the parameters in the configuration history information does not satisfy the predetermined criterion, modifying a plurality of the network configuration parameters; and

establishing a second network connection between the client node and the host node using the modified network configuration parameters.

- 5. The computer-implemented method of claim 4, wherein the at least one modem configuration parameter includes a dialed number parameter and a connection speed parameter.
- 5 6. The computer-implemented method of claim 5, wherein the at least one modem configuration parameter further includes a data compression technique parameter and a modulation technique parameter.
  - 7. The computer-implemented method of claim 1, wherein: the first network connection comprises a first Internet connection; the at least one network configuration parameter comprises at least one Internet configuration parameter; and

10


15

20

30

the second network connection comprises a second Internet connection.

- 8. The computer-implemented method of claim 7, wherein the at least one Internet configuration parameter includes a host Internet Protocol (IP) address parameter and a connection speed parameter.
- 9. The computer-implemented method of claim 8, wherein the at least one Internet configuration parameter further includes a data compression technique parameter and an encryption technique parameter.
- The computer-implemented method of claim 1, wherein the configuration history information includes a dialed number parameter and a connection speed
   parameter.
  - 11. The computer-implemented method of claim 1, wherein the configuration history information includes a host Internet Protocol (IP) address parameter and a connection speed parameter.
  - 12. The computer-implemented method of claim 1, wherein the configuration history information includes a performance statistic.



- 14. The computer-implemented method of claim 1, wherein the policy information further includes host access information used by the client node when modifying the network configuration parameter.
  - 15. The computer-implemented method of claim 14, wherein the host access information includes at least one modern access number.
- 16. The computer-implemented method of claim 14, wherein the host access information includes at least one Internet Protocol (IP) address.
- 17. The computer-implemented method of claim 1, further comprising terminating the first network connection.
  - 18. The computer-implemented method of claim 1, further comprising sending the configuration history information to the host node.
- 20 19. The computer-implemented method of claim 1, further comprising collecting additional configuration history information on the client node, the additional configuration history information containing at least one parameter that is related to the second network connection.
- 25 20. A computer system, comprising:

5

10

- a storage device to store a database;
- a memory; and
- a processor operable to execute instructions contained in the memory, the processor being thereby programmed to:
- establish a first network connection with a host node using at least one network configuration parameter stored in the database;

store configuration history information in the database, the configuration history information having at least one parameter that is related to the first network connection;

analyze policy information having a rule that is used for specifying a predetermined criterion;

if one of the parameters in the configuration history information does not satisfy the predetermined criterion, modify one of the network configuration parameters; and

establish a second network connection with the host node using the modified network configuration parameter.

- 21. The computer system of claim 20, further comprising an input/output device.
- The computer system of claim 20, further comprising a network adaptor to
   interface with a network device during establishment of the first and second network connections.
  - 23. The computer system of claim 22, wherein the network device is a modem.
- 20 24. The computer system of claim 22, wherein the network device is a cable modem.
  - 25. A computer system, comprising:

5

10

25

30

means for establishing a first network connection between a client node and a host node using at least one network configuration parameter;

means for collecting configuration history information on the client node, the configuration history information containing at least one parameter that is related to the first network connection;

means for analyzing policy information on the client node, the policy information containing a rule that is used for specifying a predetermined criterion;

if one of the parameters in the configuration history information does not satisfy the predetermined criterion, means for modifying one of the network configuration parameters; and means for establishing a second network connection between the client node and the host node using the modified network configuration parameter.

26. A computer-readable medium having computer-executable instructions contained therein for performing a method, the method comprising:

5

10

15

establishing a first network connection between a client node and a host node using at least one network configuration parameter;

collecting configuration history information on the client node, the configuration history information containing at least one parameter that is related to the first network connection;

analyzing policy information on the client node, the policy information containing a rule that is used for specifying a predetermined criterion;

if one of the parameters in the configuration history information does not satisfy the predetermined criterion, modifying one of the network configuration parameters; and

establishing a second network connection between the client node and the host node using the modified network configuration parameter.



# **ABSTRACT**

One implementation provides a computer-implemented method for modifying network configuration information on a client node. In this implementation, the client node establishes a first network connection with a host node using at least one network configuration parameter and collects configuration history information. The configuration history information includes at least one parameter that is related to the first network connection. The client node also analyzes policy information that includes a rule that is used for specifying a predetermined criterion. If one of the parameters in the configuration history information does not satisfy the predetermined criterion, the client node modifies one of the network configuration parameters. The client node is then capable of establishing a second network connection with the host node using the modified network configuration parameter.

15

10

5

60196396.doc

Page 1 of 8

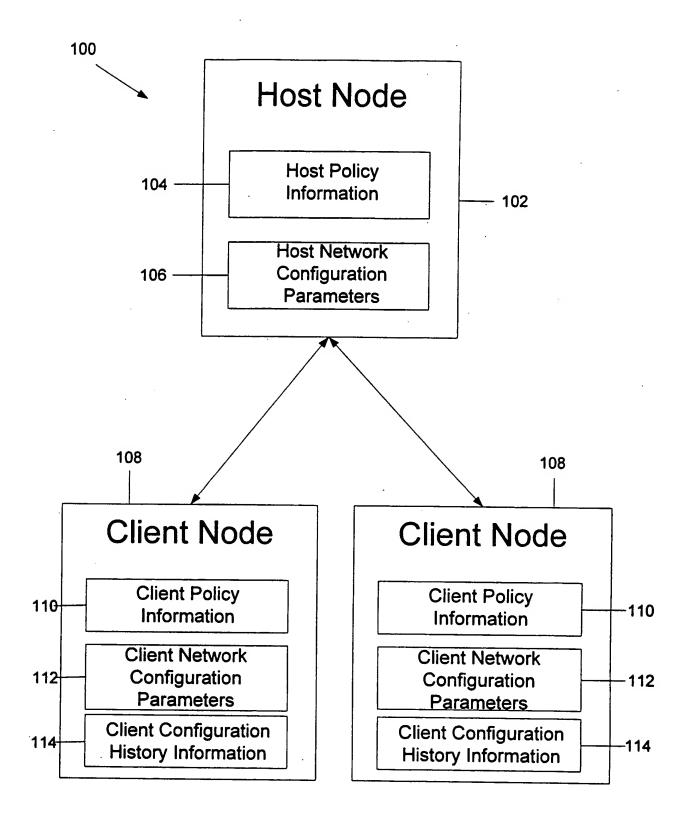


FIG. 1

ppln No.: New Application
Applicant(s): Peter A. Fortman et al.
NETWORK CONFIGURATION MANAGEMENT

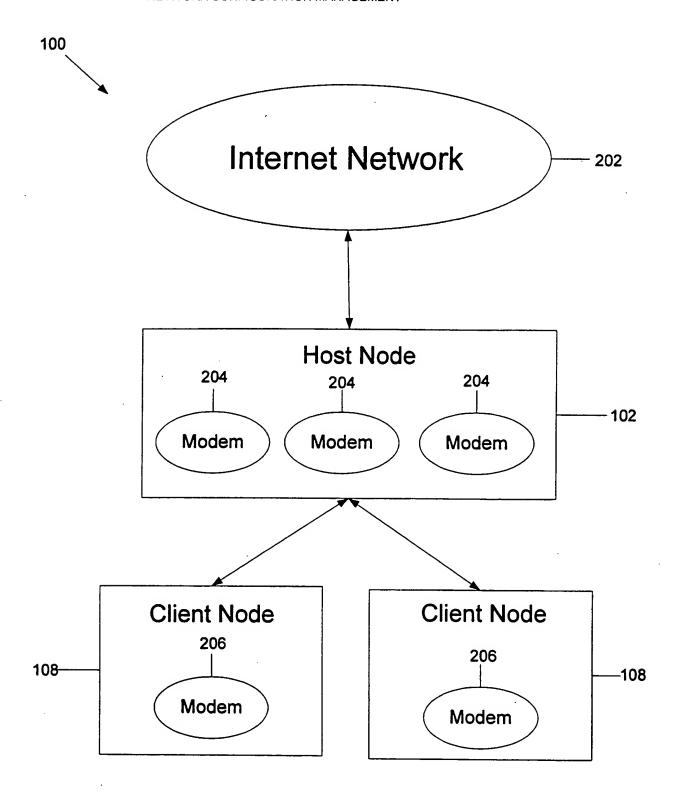


FIG. 2A

Page 3 of 8

Appln No.: New Application

Applicant(s): Peter A. Fortman et al.

NETWORK CONFIGURATION MANAGEMENT

102 **Host Node Host Modem Policy Information** Access phone numbers 104 Rules for cost/performance **Host Modem Parameters** Dialer number Data compression technique 106A Modulation technique **Connection Speed** 

FIG. 2B

108 **Client Node** Client Modem Policy Information Access phone numbers -110 Rules for cost/performance **Client Modem Parameters** Dialed number Data compression technique 112 Modulation technique **Connection Speed Client Modem History Information** Last connection speed 114 Dialed number Performance statistics

FIG. 2C

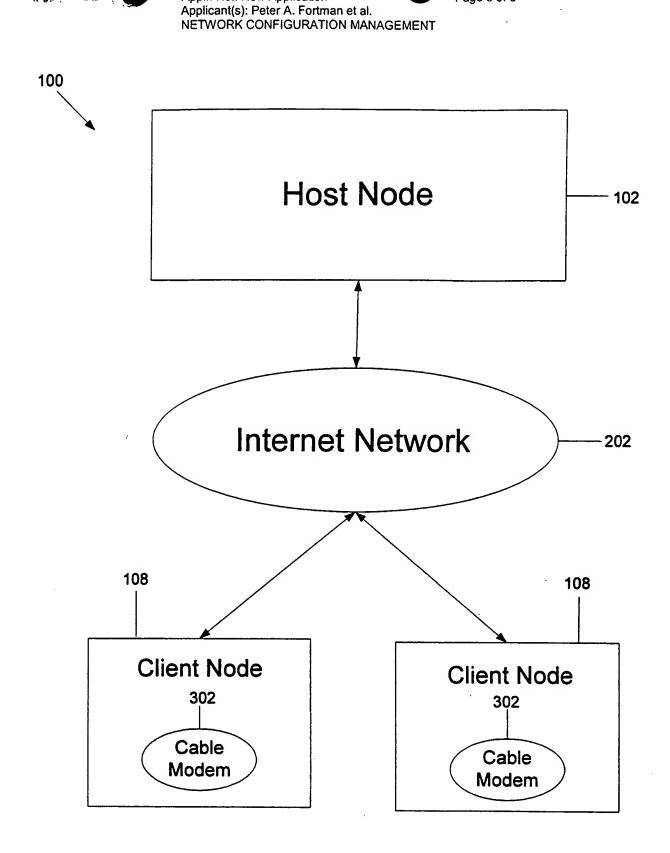


FIG. 3A

Page 6 of 8 10/519095

Appln No.: New Application

Applicant(s): Peter A. Fortman et al.
NETWORK CONFIGURATION MANAGEMENT

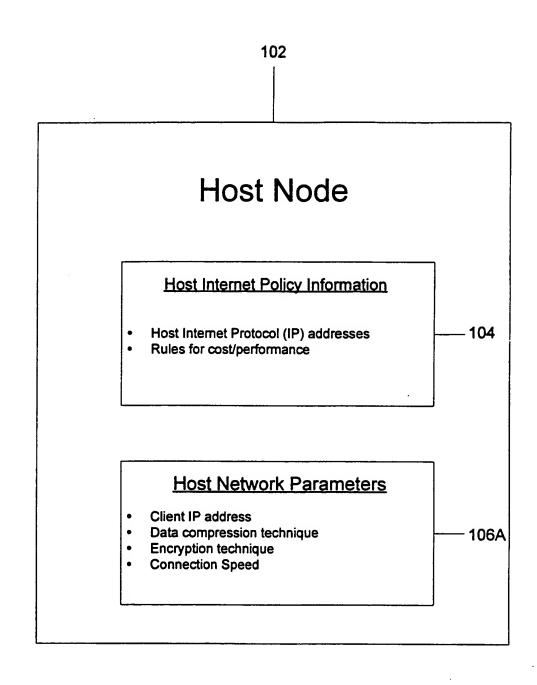


FIG. 3B

Appln No.: New Application
Applicant(s): Peter A. Fortman et al.
NETWORK CONFIGURATION MANAGEMENT

108 **Client Node Client Internet Policy Information** Host Internet Protocol (IP) addresses 110 Rules for cost/performance **Client Network Parameters** Host IP address Data compression technique - 112 Encryption technique **Connection Speed Client Network History Information** Last connection speed 114 Host IP address Performance statistics

FIG. 3C

10/519095

Page 8 of 8

Appln No.: New Application
Applicant(s): Peter A. Fortman et al.
NETWORK CONFIGURATION MANAGEMENT



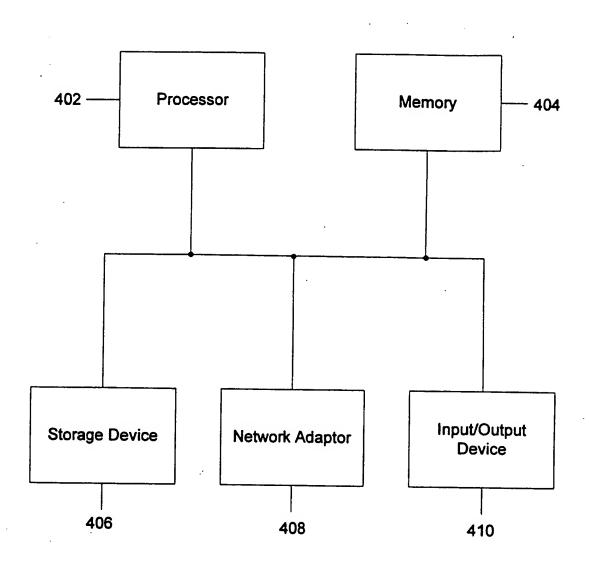


FIG. 4